
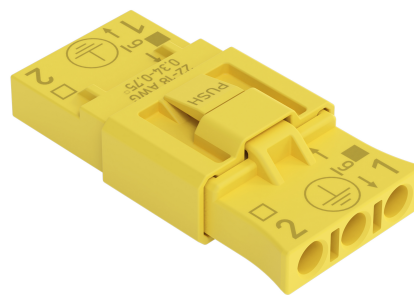




Data Sheet | Item Number: 873-343/000-1200

Luminaire disconnect connector; 3-pole; 0,75 mm²; yellow

<https://www.wago.com/873-343/000-1200>

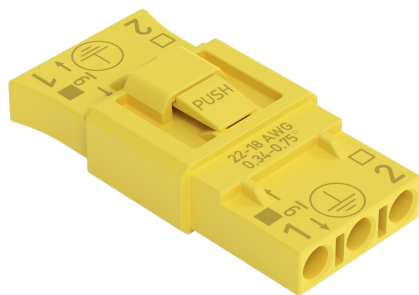

Color: ■ yellow

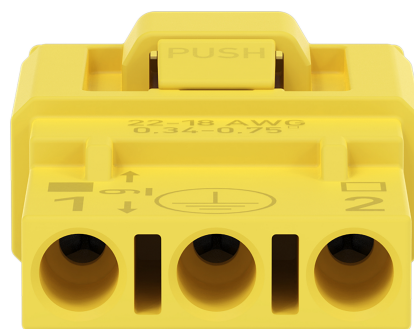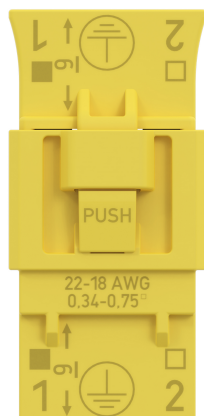

Installation terminal block, 873 Series, PUSH WIRE®

Installation terminal block (item number 873-343/000-1200) provides seamless electrical installations. Strip lengths must be between 9 and 10 mm when connecting conductors to installation terminal block. The installation terminal block also serves as a lighting connector. This product features conductor terminals and utilizes PUSH WIRE®. Our PUSH WIRE® connection offers a quick and simple method for connecting solid conductors. Dimensions: (19 x 10 x 39.7) mm (width x height x depth). Installation terminal block is suitable for conductor cross-sections ranging from 0.34 mm² to 0.75 mm².



- Safe and fast installation
- Actuation via push-in
- Compact sizes
- 3 connection points

Electrical data

Ratings per IEC/EN	
Ratings per	IEC/EN 61984
Nominal voltage (II/2)	400 V
Rated impulse withstand voltage (II/2)	4 kV
Rated current	3 A

Connection Data

Clamping units	6
Total number of potentials	3
Number of levels	1

Connection 1	
Connection technology	PUSH WIRE®
Actuation type	Push-in
Connectable conductor materials	Copper
Solid conductor	0.34 ... 0.75 mm² / 22 ... 18 AWG
Strip length	9 ... 10 mm / 0.35 ... 0.39 inches
Pole number	3

Physical data

Width	19 mm / 0.748 inches
Height	10 mm / 0.394 inches
Depth	39.7 mm / 1.562 inches

Mechanical data

Marking	1 ⊕ 2
---------	-------

Material data

Note (material data)	Information on material specifications can be found here
Color	yellow
Weight	5.2 g

Commercial data

PU (SPU)	1000 pcs
Packaging type	Bag
GTIN	4066966861570
Customs tariff number	85366990990



Product Classification	
UNSPSC	39121421
ETIM 10.0	EC002560
ECCN	NO US CLASSIFICATION

Environmental Product Compliance	
RoHS Compliance Status	Compliant, No Exemption